

Award 2009

POWERFUL PERFORMANCE IN A COMPACT HYBRID DESIGN







Sophisticated hybrid design for versatile setup in countertop or floor-standing console configuration, expandable to 4-tray console with a maximum paper capacity of 2,100 sheets.

exciting examples of the SHARP FRONTIER DX SERIES, bringing brilliant color output closer to your workgroup with a HYBRID DESIGN that has a small footprint to fit smaller environments. But these models aren't small on functionality. The informative color navigation screen simplifies operation by providing an intuitive user interface to keep ahead of today's fast-paced office document distribution needs. Incorporating next-generation COMMON CONTROLLER ARCHITECTURE, the DX Series provides uniform functionality and operability as found in Sharp's AWARD-WINNING MFP

PRODUCT LINE. Engineered to help reduce operating costs and downtime, the Frontier DX Series is easier than ever to set up, monitor, and maintain. These models offer modular expandability, remote-access capabilities, and a VALUE-ADDED APPROACH to network and software integration.

The latest in a long line of innovative products from today's fastest-growing name in office electronics, they also incorporate Sharp's AWARD-WINNING Sharp OSA® PLATFORM and the industry-leading Sharp security suite to help protect data and control access. In action, their ease and versatility will change your mind about MFPs. More power, less complexity...that's WORK WITHOUT LIMITS.

PRODUCTIVITY IN ACTION TO SPEED OUTPUT AND STREAMLINE DOCUMENT WORKFLOW

- Vivid color and crisp black-and-white documents can be quickly and accurately produced at speeds up to 31 (DX-C310/DX-C311) or 40 (DX-C400/DX-C401) pages per minute.
- Powerful 800 MHz (DX-C310/DX-C311) and 1 GHz (DX-C400/DX-C401) controller for true multi-tasking performance and increased multi-functional productivity.
- High-Resolution color display with informative graphical user interface that makes advanced copying, printing, scanning and faxing functions easy to use.
 - DX-C311/DX-C401 Touch Display allows users to easily locate, identify and retrieve files using thumbnail preview and
 image preview modes for fast document storage and retrieval. It also displays previews of incoming and Internet faxes.
 - DX-C310/DX-C400 LCD control panel displays previews of incoming faxes and Internet faxes as well as
 previews of stored fax data.
- Optional Inner Finisher can be added without taking up much additional space. The space-efficient finisher not only
 provides exceptional productivity but also automates time-consuming tasks such as stapling, sorting and offset stacking.
- Direct USB Scanning and Printing provide a whole new level of convenience. It comes in handy for scanning
 documents directly to a USB memory device and is an easy way to print PDF* documents.





The Sharp Frontier DX Series delivers

fast output, superior color quality and

compact footprint closer to the

workgroup. Advanced and easy to

operate features will help maximize

performance, improve office efficiency,

simplify document workflow and reduce

operating expense. Incorporating

Sharp's next-generation common

controller architecture, these powerful

multi-tasking MFPs meet the fast-paced

- The optional **Super G3 Fax Kit** with intelligent Inbound Fax Routing delivers lightning-fast faxing for busy workgroups.
- Sharp's powerful ImageSENDTM technology securely scans documents to up to seven destinations, including:
 USB devices, network folders, e-mail, fax machines and desktop PCs, at speeds up to 35 images per minute. You get one-touch distribution features that centralize document workflow helping save time and money.
- With **Sharpdesk**® **personal document management software**, users can easily organize their scanned documents and integrate them into everyday workflow.
- The optional **Business Card Feeder** can automatically feed and scan business cards and is capable of working with commercially available business card scanning software to automate contact database entry.



Front Panel USB 2.0 port for easy access.



Optional Business Card Feeder



DX-C310 and DX-C400 Color Navigation Panel.

^{*} PDF Direct Print is standard on DX-C311/DX-C401. Requires MX-PKX5 option for DX-C310/DX-C400.

INNOVATIVE DESIGN TO SAVE TIME AND MONEY

For years, digital multifunction printer/copiers have added more features and functions. But functionality can lead to over-complexity. That's why Sharp created the HYBRID DESIGN of the FRONTIER DX SERIES, integrating strategies to help SIMPLIFY OPERATION, REDUCE COSTS and PROTECT THE ENVIRONMENT. The new Sharp FRONTIER DX SERIES color MFP models are designed to make it EASIER AND FASTER to set up, operate, control, monitor, manage and maintain. Sophisticated but intuitive, these models enable even first-time users to operate PRINTING, COPYING, SCANNING AND FAXING functions with greater ease and efficiency. These models are engineered for LOW MAINTENANCE and QUICK SERVICEABILITY. Like traditional MFPs, they incorporate long-life tri-component supplies consisting of separate toner, developer and drum cartridges, to help LOWER COST PER PAGE and REDUCE TOTAL COST OF OWNERSHIP. Finally, the DX models are ENVIRONMENTALLY-FRIENDLY in design, engineering and manufacturing. The new models have been designed with a STRONG COMMITMENT to helping to protect the environment. They assist businesses to reduce energy consumption, minimize waste and recycle toner more easily through Sharp's TONER RECYCLING PROGRAM.







USER-FRIENDLY, ECO-FRIENDLY OPERATION TO HELP SPEED WORK, PROLONG LIFE AND REDUCE COST

- By utilizing a long-life tri-component supplies system consisting of individual toner, developer and drum
 cartridges, the working life of developer and drums is significantly prolonged—and consumables yield can
 be up to six times higher than that of typical mono-unit consumable systems.
- Sharp encourages customers to make use of the Toner Recycling Program that provides a pre-paid shipping label for returning used Sharp toner cartridges to our recycling facility. Learn more at: www.sharpusa.com/recycle.
- In replenishing supplies, downtime is virtually eliminated to lower operating costs—and waste is reduced because the drums and developers are used to their maximum life.



The Sharp FRONTIER DX SERIES
is designed to minimize service
requirements and maximize uptime.
These models employ long-life,
quick-replace cartridges to help
extend supplies replenishment
intervals and dramatically reduce
downtime. Maintenance is
trouble-free, with clean and simple
replacement of supplies and machine
maintenance procedures that can
be performed quickly and easily.

- Supplies can be replenished with no mess and no tools required. Maintenance parts such as: primary
 transfer belt, transfer roller, fuser, paper feed rollers and document feed rollers are also designed for quick,
 tool-free replacement.
- Power consumption on these DX models are among the lowest in its class. These models comply with the Energy Star™ Program and the RoHS program to minimize energy consumption and the use of chemicals and materials that can harm the environment.
- Built on a sophisticated and rugged unibody frame, the Fronter DX Series is constructed to absorb vibration, reduce operating noise, and consistently produce superior image quality.
- Sharp's second-generation micro-fine toner technology and new developer combine to reduce graininess, produce clear reproduction of fine lines and halftone colors, and offer a lower consumption rate than conventional toner. The result is breathtaking image quality, less packaging materials and longer replacement intervals.
- Environmental leadership is a long tradition at Sharp. In 2007, we received the Green Contractor Award
 and the Evergreen Award from the U.S. government in recognition of our overall commitment to
 environmentally-friendly products, services, manufacturing procedures and for our recycling and waste
 reduction practices. For more information, please visit www.sharpusa.com/environment.



Quick Replace Cartridges for Easy Maintenance This design makes service and general maintenance easier to virtually eliminate downtime and enhance productivity.



Highly-Rigid Main Frame Helps better protect and isolate critical machine components.

navigation





Image Send Screen

Easy to use interface lets you quickly select, change & view scanning settings right from the panel.



Thumbnail Previewing*

Quickly & easily locate, retrieve & print filed documents and stored faxes in full color.



Image Check*

Ability to view & check the image quality of stored files. Easily zoom, rotate and scroll.

Above screen captures are taken from the DX-C311/DX-C401 8.5" LCD.

SIMPLE OPERATION WITH TOTAL CONTROL OVER INPUT, OUTPUT AND DOCUMENT ACCESS

The Frontier DX Series incorporates a high-resolution color display that's SO EASY TO USE, IT HELPS EVERY USER

BE MORE PRODUCTIVE. For workflow intensive environments, the Sharp DX-C311 and DX-C401 models feature an

8.5" WIDE-SCREEN COLOR TOUCH-DISPLAY WITH intuitive graphical user interface. For less demanding

applications, the Sharp DX-C310 and DX-C400 models feature a brilliant 4.3" LCD COLOR NAVIGATION PANEL

making it easy to process complex color print jobs and deliver documents in less time.

JOB STATUS

SYSTEM SETTINGS

PRINT RE

AGE SEND

LINE

HOME

ig it easy to pro	ocess complex col	or print jobs and	deliver document
1	2	3	(C)
4	5	6	
7	8	9	



DAIA



On-Screen Keyboard

Easily enter data such as e-mail addresses and file names using its on-screen keyboard or connect an external keyboard to its USB port.



Job Status

Display the status of all print, copy, scan & fax jobs waiting in queue. Can't wait for a copy? Instantly prioritize your job.



Error Recovery

Easily rectify problems following on-screen, illustrated step-by-step prompts.

Above screen captures are taken from the DX-C311/DX-C401 8.5" LCD.

PERSONALIZED AND VERSATILE APPLICATION INTEGRATION



Sharp OSA® technology at a glance

- Automate tasks and save time with seamless integration between the Frontier DX Series and network applications
- Centralized applications minimize set-up and installation on multiple Sharp products
- Virtually eliminates repetitive tasks and streamlines workflow, increasing efficiency
- Maximize your return on investment with tighter integration among IT assets
- Industry standard programming leads to faster deployment of new solutions

Today's multifunction products must be versatile enough to handle fast-changing system requirements and security demands. For Sharp, that's a given—but we've gone much further. Designed for today's mobile and flexible workplace, the Frontier DX Series supports the AWARD-WINNING SHARP OSA development platform. This 3RD GENERATION TECHNOLOGY delivers unparalleled efficiency, control and convenience. With SEAMLESS INTEGRATION, Sharp OSA-developed applications provide a window into your business applications, so you can access what you need, when you need it, right from the touch panel. With the ability to PERSONALIZE APPLICATIONS and processes specific to your business, Sharp OSA technology can help eliminate redundancy and streamline workflow. Utilizing INDUSTRY STANDARD NETWORK PROTOCOLS, such as XML and SOAP, Sharp OSA technology allows these MFPs to communicate with many different applications. As your integration and workflow needs change, count on Sharp's scalable technology to help KEEP YOU AHEAD.

Versatile

IMAGE SEND



PROVEN PROTECTION FOR CONFIDENTIAL DATA, DEVICE ACCESS AND NETWORK SAFEGUARDS

Authority Group and Access Control

The exchange of digital documents

in the 21st century creates new

challenges for network security.

Sharp has developed an awardwinning, multi-layered security

system to help protect valuable

information and maintain employee

confidentiality. No company has more

experience in maintaining digital

security-so corporate end-users

and IT professionals can count on

the proven safeguards of the

Frontier DX Series.

Advanced account management enables administrators to set authority groups for access to features of the Frontier DX Series. Administrators can control which department, for instance, has full access to color copying, printing, scanning and/or faxing. Walk up users enter a code, Local Name and Password, or LDAP User Authentication to access their features assigned to their group. Users can also login utilizing a human interface device (HID) such as a Smartcard or Common Access Card (CAC).*

Data Erase and Encryption


To help protect your data, the Frontier DX Series offers an optional data security kit that encrypts document data using **AES** (Advanced encryption standard) **encryption**. Additionally, the data security kit erases the temporary memory on the hard drive by overwriting the encrypted data up to seven times, offering an unprecedented level of assurance.

Control Device Access Over the Network

To help restrict access to the device over the network, the Frontier DX Series offers IPsec, SMB and extended support for **SSL Encryption** (Secure Sockets Layer), **IP/MAC address filtering**, IEEE 802.1x authentication, protocol enable/disable and port management for maximum security.

Documents Remain Confidential

To help protect your printed documents from unauthorized viewing, the Frontier DX Series offers encrypted PDF files for printing and scanning as well as **Confidential Printing** that requires users to enter a PIN code in order to print a queued document. Additionally, **Secure Fax Release** ensures received fax documents are held in memory until an authorized user enters a PIN code. So compliance with healthcare regulations such as HIPAA is easier.

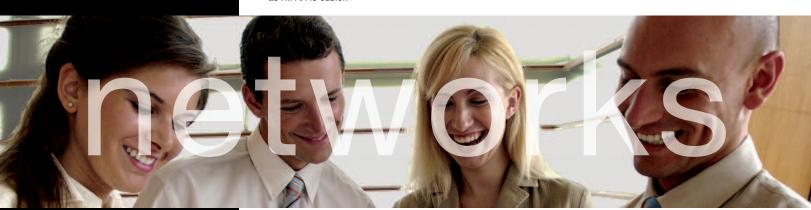

Network Scanning Access

To help protect your network from unauthorized e-mail communications, the Frontier DX Series supports **User Authentication**, requiring users to login before performing any network scanning operations.

Tracking and Auditing Information

Legislation and industry policies require companies to be more aware of information flow from their offices. Sharp offers both built-in and additional hardware/software which allows users to control, access and track usage of each device on the network.

These scalable security offerings aim to protect your intellectual property, preserve confidential information and help your business to meet regulatory requirements, such as the Health Insurance Portability and Accountability Act (HIPAA), and the Gramm Leach Bliley Act (GLB). For additional information visit: www.sharpusa.com/security



"Most Secure MFF Range" Award–6 Years 2004-2009



DEVICE MANAGEMENT MAXIMIZES PRODUCTIVITY AND CONTROL

manage



The Sharp 24/7 Training Advantage

To make managing your new Frontier DX Series document systems simple and easy, ask your local Authorized Sharp Dealer about My Sharp, a dedicated customer-care website that offers solutions, resources and information specific to your new Sharp product.

Sharp's Frontier DX Series combines integrated, user-friendly software with robust device management technology to help IT professionals manage usage, control costs and minimize downtime. To maximize opportunities while reducing document and support costs, office environments must MANAGE

DOCUMENT WORKFLOW with greater intelligence. The Sharp ADMINISTRATION UTILITY SUITE

is designed to do just that. It allows administrators to MANAGE DEVICES more efficiently. They can

remotely manage the set-up, configuration, device settings and more! The convenience of an Embedded

Web Page gives users advanced WEB-BASED MANAGEMENT TOOL of network scanning, profiles

and web-links—while administrators can access device settings, color controls, account information

and security settings to help SAVE TIME and IMPROVE PRODUCTIVITY. Sharp's device

 $management\ system\ lets\ you\ \textbf{TAKE\ CHARGE}\ of\ color\ usage\ and\ costs.\ A\ new\ \textbf{REMOTE\ FRONT}$

PANEL feature allows help desk professionals and support personnel to view and control the device's

LCD Panel remotely from any authorized networked PC. Our Printer Status Monitor lets network users

VIEW PRINTER CONDITIONS and check paper and toner levels right from the workstation.

Powerful and Intuitive SHARPDESK® SOFTWARE enables individuals GREATER CONTROL OF


SCANNED DOCUMENTS.







"Outstanding Network Device Management Utility"



Printer Status Monitor



Printer Administration Utility



Embedded Web Page



Remote Front Panel

DX-C310/C311/C400/C401 SPECIFICATIONS

Main Specifica	ations
	Includes multi-tasking controller, 80 GB HDD, PCL® 5c/PCL 6,
DA-0400/DA-0401	Postscript® 3 (Optional in DX-C310/DX-C400), network printing, network scanning, 50-sheet RSPF, auto-duplex,
	500-sheet paper drawers and 100-sheet bypass. Black
	and color developer, drum and starter toner cartridges are included in the box.
Type	Color multi-function digital document system
Functions	Copy, print, network print, network scan, document filing
LCD	and fax ¹ DX-C311/DX-401: 8.5" W-VGA Color Touch Panel
LOD	DX-C310/DX-400: 4.3" Q-VGA Color Display
Copy System	Dry electrostatic transfer/Dual component developer/
	Magnetic brush development/OPC drums/Heat Roller fusing/Xenon Lamp Exposure
Originals	Sheets and Bound Documents
Max Original Size	8-1/2" x 14"
Copy Size Copy Speed	Min 5-1/2" x 8-1/2"/Max 8-1/2" x 14" DX-C310/DX-C311: 31 ppm B&W/Color (Letter)
оору ореец	DX-C400/DX-C401: 40 ppm B&W/Color (Letter)
Multiple Copy	Max: 999 copies
First Copy Time	Platen glass: 8.0 sec or less (B&W); 8.9 sec or less (color)
	RSPF: 9.9 sec or less (B&W); 11.5 sec or less (color) (Based on A4 original using tray 1*)
Warm-Up Time	90 seconds or less*
Magnification	50% to 200% in 1% increments (50 to 200% for RSPF)
Original Feed Scan Speed	50-sheet RSPF Copy mode (Simplex): Up to 35 ipm (B&W or color)
oddii opodd	@ 600 X 300 dpi.
	Network Scan (Simplex): Up to 35 ipm (B&W or color)
Original Sizes	@ 200 x 200 dpi. 5-1/2 x 8-1/2 / 8-1/2 x 14 (15-lb bond to 110-lb index)
Paper Feed	Standard: 500 sheet paper drawer (letter/legal) and
System	100-sheet bypass tray (letter/legal). Optional: Up to 3
Donas Timos	additional 500-sheet paper drawers (letter/legal) ²
Paper Types	Paper drawers: 16-28 lb. bond. Other paper types include: plain, pre-printed, recycled, pre-punched, letterhead, and
	color paper. Bypass Tray: 16-28 lb. bond (plain paper),
	15-16 lb. (thin paper), 28 lb. bond-110 lb. index (heavy
	paper), 20-24 lb. (Monarch/Com-10 envelope). Other types
	include label paper, gloss paper, pre-printed, recycled, pre-punched, letterhead, color film and OHP Film.
Duplexing	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing
Duplexing CPU	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz
	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz
CPU	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (Host Port), USB 2.0 (Device Port)
CPU	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (Host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB
CPU Interface Memory	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/1,000MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (Ibest Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB Standard: DX-C310/DX-C400: 512MB
CPU Interface Memory Hard Disk Drive Copy Resolution	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (Host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB Standard: DX-C310/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi
CPU Interface Memory Hard Disk Drive	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C311/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 16B Standard: DX-C310/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2
CPU Interface Memory Hard Disk Drive Copy Resolution Color Modes	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/10Base-TX/1000Base-T), USB 2.0 (Host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB Standard: DX-C310/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2 Color Mode, Single Color Mode.
CPU Interface Memory Hard Disk Drive Copy Resolution	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C311/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 16B Standard: DX-C310/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2
CPU Interface Memory Hard Disk Drive Copy Resolution Color Modes	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (Host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB Standard: DX-C310/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2 Color Mode, Single Color Mode. Modes: Automatic (Color: Magical View, B&W: Character AE) Text, Text/Photo, Text/Printed-Photo, Printed-Photo, Photo, Map, Pale-Color document. Settings: Auto exposure control
CPU Interface Memory Hard Disk Drive Copy Resolution Color Modes Exposure Control	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB Standard: DX-C311/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2 Color Mode, Single Color Mode. Modes: Automatic (Color: Magical View, B&W: Character AE) Text, Text/Photo, Text/Printed-Photo, Printed-Photo, Photo, Map, Pale-Color document. Settings: Auto exposure control or 9 step manual exposure.
CPU Interface Memory Hard Disk Drive Copy Resolution Color Modes	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (Host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB Standard: DX-C310/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2 Color Mode, Single Color Mode. Modes: Automatic (Color: Magical View, B&W: Character AE) Text, Text/Photo, Text/Printed-Photo, Printed-Photo, Photo, Map, Pale-Color document. Settings: Auto exposure control
CPU Interface Memory Hard Disk Drive Copy Resolution Color Modes Exposure Control Halftone	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (Host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB Standard: DX-C310/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2 Color Mode, Single Color Mode. Modes: Automatic (Color: Magical View, B&W: Character AE) Text, Text/Photo, Text/Printed-Photo, Printed-Photo, Photo, Map, Pale-Color document. Settings: Auto exposure control or 9 step manual exposure. 256 gradations/2 levels (monochrome) Scan-Once-Print-Many, electronic sorting, Integrated offset-stacking, Auto Color Sensing (ACS), Auto Paper
CPU Interface Memory Hard Disk Drive Copy Resolution Color Modes Exposure Control Halftone	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (Host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB Standard: DX-C310/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2 Color Mode, Single Color Mode. Modes: Automatic (Color: Magical View, B&W: Character AE) Text, Text/Photo, Text/Printed-Photo, Printed-Photo, Photo, Map, Pale-Color document. Settings: Auto exposure control or 9 step manual exposure. 256 gradations/2 levels (monochrome) Scan-Once-Print-Many, electronic sorting, Integrated offset-stacking, Auto Color Sensing (ACS), Auto Paper Sensing (APS), Auto Magnification Sensing (AMS),
CPU Interface Memory Hard Disk Drive Copy Resolution Color Modes Exposure Control Halftone	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB Standard: DX-C311/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2 Color Mode, Single Color Mode. Modes: Automatic (Color: Magical View, B&W: Character AE) Text, Text/Photo, Text/Printed-Photo, Printed-Photo, Photo, Map, Pale-Color document. Settings: Auto exposure control or 9 step manual exposure. 256 gradations/2 levels (monochrome) Scan-Once-Print-Many, electronic sorting, Integrated offset-stacking, Auto Color Sensing (ACS), Auto Paper Sensing (APS), Auto Magnification Sensing (AMS), Auto tray switching (ATS), rotation copy, reverse copy,
CPU Interface Memory Hard Disk Drive Copy Resolution Color Modes Exposure Control Halftone	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (Host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB Standard: DX-C310/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2 Color Mode, Single Color Mode. Modes: Automatic (Color: Magical View, B&W: Character AE) Text, Text/Photo, Text/Printed-Photo, Printed-Photo, Photo, Map, Pale-Color document. Settings: Auto exposure control or 9 step manual exposure. 256 gradations/2 levels (monochrome) Scan-Once-Print-Many, electronic sorting, Integrated offset-stacking, Auto Color Sensing (ACS), Auto Paper Sensing (APS), Auto Magnification Sensing (AMS),
CPU Interface Memory Hard Disk Drive Copy Resolution Color Modes Exposure Control Halftone	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (Host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB Standard: DX-C310/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2 Color Mode, Single Color Mode, Modes: Automatic (Color: Magical View, B&W: Character AE) Text, Text/Photo, Text/Printed-Photo, Printed-Photo, Photo, Map, Pale-Color document. Settings: Auto exposure control or 9 step manual exposure. 256 gradations/2 levels (monochrome) Scan-Once-Print-Many, electronic sorting, Integrated offset-stacking, Auto Color Sensing (ACS), Auto Paper Sensing (APS), Auto Magnification Sensing (AMS), Auto tray switching (ATS), rotation copy, reverse copy, margin shift, edge erase, OHP insertion, card shot, reverse image, black-white reversal, centering, proof copy (DX-C311/DX-C401), 2-in-1, photo repeat,
CPU Interface Memory Hard Disk Drive Copy Resolution Color Modes Exposure Control Halftone	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (Host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB Standard: DX-C310/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2 Color Mode, Single Color Mode. Modes: Automatic (Color: Magical View, B&W: Character AE) Text, Text/Photo, Text/Printed-Photo, Printed-Photo, Photo, Map, Pale-Color document. Settings: Auto exposure control or 9 step manual exposure. 256 gradations/2 levels (monochrome) Scan-Once-Print-Many, electronic sorting, Integrated offset-stacking, Auto Color Sensing (ACS), Auto Paper Sensing (APS), Auto Magnification Sensing (AMS), Auto tray switching (ATS), rotation copy, reverse copy, margin shift, edge erase, OHP insertion, card shot, reverse image, black-white reversal, centering, proof copy (DX-C311/DX-C401), 2-in-1, photo repeat, document filing (DX-C301/ DX-C401), job programs,
CPU Interface Memory Hard Disk Drive Copy Resolution Color Modes Exposure Control Halftone	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (Host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB Standard: DX-C310/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2 Color Mode, Single Color Mode, Modes: Automatic (Color: Magical View, B&W: Character AE) Text, Text/Photo, Text/Printed-Photo, Printed-Photo, Photo, Map, Pale-Color document. Settings: Auto exposure control or 9 step manual exposure. 256 gradations/2 levels (monochrome) Scan-Once-Print-Many, electronic sorting, Integrated offset-stacking, Auto Color Sensing (ACS), Auto Paper Sensing (APS), Auto Magnification Sensing (AMS), Auto tray switching (ATS), rotation copy, reverse copy, margin shift, edge erase, OHP insertion, card shot, reverse image, black-white reversal, centering, proof copy (DX-C311/DX-C401), 2-in-1, photo repeat,
CPU Interface Memory Hard Disk Drive Copy Resolution Color Modes Exposure Control Halftone Copy Features	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/1,000MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (Host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB Standard: DX-C310/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2 Color Mode, Single Color Mode. Modes: Automatic (Color: Magical View, B&W: Character AE) Text, Text/Photo, Text/Printed-Photo, Printed-Photo, Photo, Map, Pale-Color document. Settings: Auto exposure control or 9 step manual exposure. 256 gradations/2 levels (monochrome) Scan-Once-Print-Many, electronic sorting, Integrated offset-stacking, Auto Color Sensing (ACS), Auto Paper Sensing (APS), Auto Magnification Sensing (AMS), Auto tray switching (ATS), rotation copy, reverse copy, margin shift, edge erase, OHP insertion, card shot, reverse image, black-white reversal, centering, proof copy (DX-C311/DX-C401), 2-in-1, photo repeat, document filing (DX-C301/ DX-C401), job programs, date/character/page stamp (color) Up to 1000 users. Supports user-number authentication (on device), login name/management, date/character/page
CPU Interface Memory Hard Disk Drive Copy Resolution Color Modes Exposure Control Halftone Copy Features	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (Host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB Standard: DX-C310/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2 Color Mode, Single Color Mode. Modes: Automatic (Color: Magical View, B&W: Character AE) Text, Text/Photo, Text/Printed-Photo, Printed-Photo, Photo, Map, Pale-Color document. Settings: Auto exposure control or 9 step manual exposure. 256 gradations/2 levels (monochrome) Scan-Once-Print-Many, electronic sorting, Integrated offset-stacking, Auto Color Sensing (ACS), Auto Paper Sensing (APS), Auto Magnification Sensing (AMS), Auto tray switching (ATS), rotation copy, reverse copy, margin shift, edge erase, OHP insertion, card shot, reverse image, black-white reversal, centering, proof copy (DX-C311/DX-C401), 2-in-1, photo repeat, document filing (DX-C301/ DX-C401), job programs, date/character/page stamp (color) Up to 1000 users. Supports user-number authentication (on device), login name/management, date/character/page stamp (color), copy, print, scan, fax and document
CPU Interface Memory Hard Disk Drive Copy Resolution Color Modes Exposure Control Halftone Copy Features Account Control	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (Host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB Standard: DX-C310/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2 Color Mode, Single Color Mode. Modes: Automatic (Color: Magical View, B&W: Character AE) Text, Text/Photo, Text/Printed-Photo, Printed-Photo, Photo, Map, Pale-Color document. Settings: Auto exposure control or 9 step manual exposure. 256 gradations/2 levels (monochrome) Scan-Once-Print-Many, electronic sorting, Integrated offset-stacking, Auto Color Sensing (ACS), Auto Paper Sensing (APS), Auto Magnification Sensing (AMS), Auto tray switching (ATS), rotation copy, reverse copy, margin shift, edge erase, OHP insertion, card shot, reverse image, black-white reversal, centering, proof copy (DX-C311/DX-C401), 2-in-1, photo repeat, document filing (DX-C301/ DX-C401), job programs, date/character/page stamp (color) Up to 1000 users. Supports user-number authentication (on device), login name/management, date/character/page stamp (color), copy, print, scan, fax and document
CPU Interface Memory Hard Disk Drive Copy Resolution Color Modes Exposure Control Halftone Copy Features	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (Host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB Standard: DX-C310/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2 Color Mode, Single Color Mode, Modes: Automatic (Color: Magical View, B&W: Character AE) Text, Text/Photo, Text/Printed-Photo, Printed-Photo, Photo, Map, Pale-Color document. Settings: Auto exposure control or 9 step manual exposure. 256 gradations/2 levels (monochrome) Scan-Once-Print-Many, electronic sorting, Integrated offset-stacking, Auto Color Sensing (ACS), Auto Paper Sensing (APS), Auto Magnification Sensing (AMS), Auto tray switching (ATS), rotation copy, reverse copy, margin shift, edge erase, OHP insertion, card shot, reverse image, black-white reversal, centering, proof copy (DX-C311/DX-C401), 2-in-1, photo repeat, document filing (DX-C301/ DX-C401), job programs, date/character/page stamp (color) Up to 1000 users. Supports user-number authentication (on device), login name/management, date/character/page stamp (color), copy, print, scan, fax and document management Main output tray (top) 250 sheets (face down)
CPU Interface Memory Hard Disk Drive Copy Resolution Color Modes Exposure Control Halftone Copy Features Account Control Output Tray Capacity Firmware	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (Host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB Standard: DX-C310/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2 Color Mode, Single Color Mode. Modes: Automatic (Color: Magical View, B&W: Character AE) Text, Text/Photo, Text/Printed-Photo, Printed-Photo, Photo, Map, Pale-Color document. Settings: Auto exposure control or 9 step manual exposure. 256 gradations/2 levels (monochrome) Scan-Once-Print-Many, electronic sorting, Integrated offset-stacking, Auto Color Sensing (ACS), Auto Paper Sensing (APS), Auto Magnification Sensing (AMS), Auto tray switching (ATS), rotation copy, reverse copy, margin shift, edge erase, OHP insertion, card shot, reverse image, black-white reversal, centering, proof copy (DX-C311/DX-C401), 2-in-1, photo repeat, document filing (DX-C301/ DX-C401), job programs, date/character/page stamp (color) Up to 1000 users. Supports user-number authentication (on device), login name/management, date/character/page stamp (color), copy, print, scan, fax and document management Main output tray (top) 250 sheets (face down)
CPU Interface Memory Hard Disk Drive Copy Resolution Color Modes Exposure Control Halftone Copy Features Account Control Output Tray Capacity Firmware Management	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (Host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 16B Standard: DX-C310/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2 Color Mode, Single Color Mode. Modes: Automatic (Color: Magical View, B&W: Character AE) Text, Text/Photo, Text/Printed-Photo, Printed-Photo, Photo, Map, Pale-Color document. Settings: Auto exposure control or 9 step manual exposure. 256 gradations/2 levels (monochrome) Scan-Once-Print-Many, electronic sorting, Integrated offset-stacking, Auto Color Sensing (ACS), Auto Paper Sensing (APS), Auto Magnification Sensing (AMS), Auto tray switching (ATS), rotation copy, reverse copy, margin shift, edge erase, OHP insertion, card shot, reverse image, black-white reversal, centering, proof copy (DX-C311/DX-C401), 2-in-1, photo repeat, document filing (DX-C301/ DX-C401), job programs, date/character/page stamp (color) Up to 1000 users. Supports user-number authentication (on device), login name/management, date/character/page stamp (color), copy, print, scan, fax and document Main output tray (top) 250 sheets (face down)
CPU Interface Memory Hard Disk Drive Copy Resolution Color Modes Exposure Control Halftone Copy Features Account Control Output Tray Capacity Firmware	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (Host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB Standard: DX-C310/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2 Color Mode, Single Color Mode. Modes: Automatic (Color: Magical View, B&W: Character AE) Text, Text/Photo, Text/Printed-Photo, Printed-Photo, Photo, Map, Pale-Color document. Settings: Auto exposure control or 9 step manual exposure. 256 gradations/2 levels (monochrome) Scan-Once-Print-Many, electronic sorting, Integrated offset-stacking, Auto Color Sensing (ACS), Auto Paper Sensing (APS), Auto Magnification Sensing (AMS), Auto tray switching (ATS), rotation copy, reverse copy, margin shift, edge erase, OHP insertion, card shot, reverse image, black-white reversal, centering, proof copy (DX-C311/DX-C401), 2-in-1, photo repeat, document filing (DX-C301/ DX-C401), job programs, date/character/page stamp (color) Up to 1000 users. Supports user-number authentication (on device), login name/management, date/character/page stamp (color), copy, print, scan, fax and document management Main output tray (top) 250 sheets (face down)
CPU Interface Memory Hard Disk Drive Copy Resolution Color Modes Exposure Control Halftone Copy Features Account Control Output Tray Capacity Firmware Management Configuration Method	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (Host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB Standard: DX-C310/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2 Color Mode, Single Color Mode. Modes: Automatic (Color: Magical View, B&W: Character AE) Text, Text/Photo, Text/Printed-Photo, Printed-Photo, Photo, Map, Pale-Color document. Settings: Auto exposure control or 9 step manual exposure. 256 gradations/2 levels (monochrome) Scan-Once-Print-Many, electronic sorting, Integrated offset-stacking, Auto Color Sensing (ACS), Auto Paper Sensing (APS), Auto Magnification Sensing (AMS), Auto tray switching (ATS), rotation copy, reverse copy, margin shift, edge erase, OHP insertion, card shot, reverse image, black-white reversal, centering, proof copy (DX-C311/DX-C401), 2-in-1, photo repeat, document filing (DX-C301/ DX-C401), job programs, date/character/page stamp (color) Up to 1000 users. Supports user-number authentication (on device), login name/management, date/character/page stamp (color), copy, print, scan, fax and document management Main output tray (top) 250 sheets (face down)
CPU Interface Memory Hard Disk Drive Copy Resolution Color Modes Exposure Control Halftone Copy Features Account Control Output Tray Capacity Firmware Management Configuration	pre-punched, letterhead, color film and OHP Film. Standard automatic duplex copying and printing DX-C310/DX-C311: Power QUICCIII-MPC8533E/800MHz DX-C400/DX-C401: Power QUICCIII-MPC8533E/1,000MHz RJ-45 Ethernet (10Base-T/100Base-TX/1000Base-T), USB 2.0 (Host Port), USB 2.0 (Device Port) Standard: DX-C311/DX-C401: 1GB Standard: DX-C311/DX-C400: 512MB 80 GB Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi Auto Color Control, Full Color Mode, Monochrome (B&W), 2 Color Mode, Single Color Mode. Modes: Automatic (Color: Magical View, B&W: Character AE) Text, Text/Photo, Text/Printed-Photo, Printed-Photo, Photo, Map, Pale-Color document. Settings: Auto exposure control or 9 step manual exposure. Scan-Once-Print-Many, electronic sorting, Integrated offset-stacking, Auto Color Sensing (ACS), Auto Paper Sensing (APS), Auto Magnification Sensing (AMS), Auto tray switching (ATS), rotation copy, reverse copy, margin shift, edge erase, OHP insertion, card shot, reverse image, black-white reversal, centering, proof copy (DX-C311/DX-C401), 2-in-1, photo repeat, document filing (DX-C301/ DX-C401), job programs, date/character/page stamp (color) Up to 1000 users. Supports user-number authentication (on device), login name/management, date/character/page stamp (color), copy, print, scan, fax and document management Main output tray (top) 250 sheets (face down)

Power	AC 100-127VAC, 60HZ, 12 AMPS
Power	Maximum: 1.44kW or less.
Consumption	
Weight	DX-C311/DX-C401: Approx. 101.4 lbs.
	DX-C310/DX-C400: Approx. 101.4 lbs.
Dimensions	DX-C310/DX-C400:
	22-3/64" (W) x 17-1/4" (D) x 28-7/64" (H)
	DX-C311/DX-C401:
	22-3/64" (W) x 19-13/32" (D) x 28-7/64" (H)
Notwork Prin	iting System (Standard)
PDL	PCL5c, PCL 6, PostScript 3 (Optional in DX-C310/
FUL	DX-C400) compatible, optional XPS
Resolution	, , , , , , , , , , , , , , , , , , , ,
	1200 dpi, 600 dpi
Print Speed	DX-C310/DX-C311: 31 ppm B&W/Color (letter)
Duint Duiveus	DX-C400/DX-C401: 40 ppm B&W/Color (letter)
Print Drivers	Windows® 98, Windows ME, Windows NT® 4 (with SP5 or
	later), Windows 2000, Windows Server® 2003, Windows
	Server 2008, Windows XP, Windows XP x64, Windows
	Server x64, Windows Vista®, Windows Vista x64, MAC OS®,
	9.2.2, OSX (including 10.2.8, 10.3.9, 10.4.11, 10.5-10.5.1),
	all MAC PPD. Windows Server 2008 x 64
Features	Continuous printing, duplex printing, pamphlet printing, N-up
	printing, image rotation, different cover page/last page,
	transparency inserts, carbon copy print mode, fit-to-page,
	poster print, margin shift, mirror image, watermarks, overlay,
	confidential print, confidential batch print, print hold, bypass
	printing, job priority printing and direct printing. (Note: Some
	features not available on certain print drivers)
Direct Printing ¹	File Types: TIFF, JPEG, PCL, PRN, TXT, PDF, Encrypted PDF,
-	Postscript and XPS. Methods: FTP, WebPage, E-mail and
	USB Memory
Resident Fonts	80 Outline Fonts
Interface	RJ-45 Ethernet 10/100/1000 Base-T
Operating	Windows 98, ME, NT4.0, 2000, XP, 2003/2008 Server,
Systems	Vista, Novell® Netware® 3x,4x, 5x, MAC OS-9.0, MAC OS-X,
	Sun® OS 4.1x, Solaris® 2 x, Unix®, Linux®, Citrix® (Metaframe,
	Presentation Server 4, 4.5) and Windows Terminal Services
Network	TCP/IP (IPv4, IPv6, IPSEC) SSL (HTTP, IPP, FTP), SNMPv3,
Protocols	802.1x for Windows and Unix. LPD and LPR for UNIX.
	IPX/SPX® for Novell environments. EtherTalk® and NetBEUI,
	AppleTalk for Macintosh® environments.
Printing	LPR, IPP, IPPS, PAP, Raw TCP (port 9100), FTP and Novell
Protocols	Pserver/Rprinter
Network	
	IP/Mac address filtering, protocol filtering, port management,
Security	user authentication and document administration.
Security	IEEE 2600-2008, DoD (NSTISSP) #11, DoD Directive 8500.2,
Standards	DoD (DISA)

Output Modes	600 api, 400 api, 300 api, 200 api, 100 api
Scan Modes	Color, monochrome, grayscale
Image Formats	Monochrome: TIFF, PDF, Encrypted PDF, XPS ¹
	Color: Grayscale, Color TIFF, JPEG, PDF, Encrypted PDF, XPS1
	Internet Fax: TIFF-FX, FIFF-F, TIFF-S1
Image	Monochrome Scanning: Uncompressed, G3 (MH), G4 (MR/MMR)
Compression	Color/Grayscale: JPEG (high, middle, low)
	Internet Fax mode: MH/MMR (option)
Scan	E-mail, Desktop, FTP, Folder (SMB), USB, Internet fax
Destinations	(option), Super G3 fax (option)
One-Touch	Up to 999 (combined scan destinations)
Destinations	
Group Destinations	Up to 500
Programs	48 (combined)
Max. Jobs	Up to 94
in Memory	
Network	TCP/IP and SSL (Includes HTTP, SMTP, LDAP, FTP, POP3),
Protocole	CMR ECMTD and 802 1v

Network Security E-mail server user authentication for LDAP and Active Directory

Sharpdesk® desktop document management software

Transmission Mode Super G3, G3

B&W Super (G3 Fax Kit	(Option)

(1 user license)

Modem Speed	33.6 KBPS ³
Compression Methods	JBIG, MMR, MR, MH
MEHIOUS	

IIILEITALE	no-45 Ethernet (10base-1/100base-1//1000base-1),	INCLINOIN	ir/iviac address lillering, protocol lillering, p
	USB 2.0 (Host Port), USB 2.0 (Device Port)	Security	user authentication and document adminis
Memory	Standard: DX-C311/DX-C401: 1GB	Security	IEEE 2600-2008, DoD (NSTISSP) #11, DoD
	Standard: DX-C310/DX-C400: 512MB	Standards	DoD (DISA)
Hard Disk Drive	80 GB		
Copy Resolution	Scan: B&W/Color: 600 dpi; Copy output: B&W/Color 600 dpi	Network Scan	ning Systems (Standard)
Color Modes	Auto Color Control, Full Color Mode, Monochrome (B&W), 2	Max Original Size	8-1/2" x 14"
	Color Mode, Single Color Mode.	Optical Resolution	600 dpi
Exposure Control	Modes: Automatic (Color: Magical View, B&W: Character AE)	Output Modes	600 dpi, 400 dpi, 300 dpi, 200 dpi, 100 d
	Text, Text/Photo, Text/Printed-Photo, Printed-Photo, Photo,	Scan Modes	Color, monochrome, grayscale
	Map, Pale-Color document. Settings: Auto exposure control	Image Formats	Monochrome: TIFF, PDF, Encrypted PDF, XF
	or 9 step manual exposure.		Color: Grayscale, Color TIFF, JPEG, PDF, End
Halftone	256 gradations/2 levels (monochrome)		Internet Fax: TIFF-FX, FIFF-F, TIFF-S1
Copy Features	Scan-Once-Print-Many, electronic sorting, Integrated	Image	Monochrome Scanning: Uncompressed, G3 (N
	offset-stacking, Auto Color Sensing (ACS), Auto Paper	Compression	Color/Grayscale: JPEG (high, middle, low)
	Sensing (APS), Auto Magnification Sensing (AMS),		Internet Fax mode: MH/MMR (option)
	Auto tray switching (ATS), rotation copy, reverse copy,	Scan	E-mail, Desktop, FTP, Folder (SMB), USB, I
	margin shift, edge erase, OHP insertion, card shot,	Destinations	(option), Super G3 fax (option)
	reverse image, black-white reversal, centering,	One-Touch	Up to 999 (combined scan destinations)
	proof copy (DX-C311/DX-C401), 2-in-1, photo repeat,	Destinations	
	document filing (DX-C301/ DX-C401), job programs,	Group Destinations	s Up to 500
	date/character/page stamp (color)	Programs	48 (combined)
Account Control	Up to 1000 users. Supports user-number authentication	Max. Jobs	Up to 94
	(on device), login name/management, date/character/page	in Memory	
	stamp (color), copy, print, scan, fax and document	Network	TCP/IP and SSL (Includes HTTP, SMTP, LD/
	management	Protocols	SMB, ESMTP and 802.1x

*	May vary depending on product configuration, machine settings
	and operating and/or environmental conditions.

Some features require optional equipment



Software











ower	AC 100-127VAC, 60HZ, 12 AMPS	Scanning Method	Sheet fed simplex or duplex or book
ower	Maximum: 1.44kW or less.	Max Transmit	400 dpi
onsumption		Resolution	
/eight	DX-C311/DX-C401: Approx. 101.4 lbs.	Transmit Speed	Approximately 2 seconds with Super
	DX-C310/DX-C400: Approx. 101.4 lbs.	Auto Dialing	Up to 999 (combined scan destination
imensions	DX-C310/DX-C400:	Group Dial/	Up to 500
	22-3/64" (W) x 17-1/4" (D) x 28-7/64" (H)	Destinations	
	DX-C311/DX-C401:	Inbound Fax	Forwards received fax data to E-mail,
	22-3/64" (W) x 19-13/32" (D) x 28-7/64" (H)	Routing	
letwork Print	ing System (Standard)	Long Length Originals	Up to 19.5" (for transmission)
DL	PCL5c, PCL 6, PostScript 3 (Optional in DX-C310/	Programs	48 (combined)
	DX-C400) compatible, optional XPS	Memory	8 MB (Exclusive)
esolution	1200 dpi, 600 dpi	Halftone	256 levels
rint Speed	DX-C310/DX-C311: 31 ppm B&W/Color (letter)	Features	Quick on-line transmission, direct trans
	DX-C400/DX-C401: 40 ppm B&W/Color (letter)		transmission/reception, rotate transmi
rint Drivers	Windows® 98, Windows ME, Windows NT® 4 (with SP5 or		reception, automatically staple receive
	later), Windows 2000, Windows Server® 2003, Windows		release, out of paper memory reception
	Server 2008, Windows XP, Windows XP x64, Windows		reception transaction reports, activity
	Server x64, Windows Vista®, Windows Vista x64, MAC OS®,		
	9.2.2, OSX (including 10.2.8, 10.3.9, 10.4.11, 10.5-10.5.1),	Inner Finisher	(Option)
	all MAC PPD. Windows Server 2008 x 64	Type	Built in Finisher
eatures	Continuous printing, duplex printing, pamphlet printing, N-up	Output Capacity	Up to 280 sheets (letter/legal),
	printing, image rotation, different cover page/last page,		100 postcard, 20 envelope
	transparency inserts, carbon copy print mode, fit-to-page,	Output Delivery	Face down
	poster print, margin shift, mirror image, watermarks, overlay,	Stapling Media	Plain/Thin/Heavy/Recycled/Letterhead
	confidential print, confidential batch print, print hold, bypass		Colored/Preprinted paper
	printing, job priority printing and direct printing. (Note: Some	Stapling Positions	Single corner position
	features not available on certain print drivers)	Power Source	Supplied from the main unit
irect Printing ¹	File Types: TIFF, JPEG, PCL, PRN, TXT, PDF, Encrypted PDF,	Stapling	30 sheets letter/legal
	Postscript and XPS. Methods: FTP, WebPage, E-mail and	Stapled Sets	10 bundles or 300 sheets (letter/lega
	USB Memory	Weight	Approx 19.8 lbs.
esident Fonts	80 Outline Fonts	Dimensions	18.67" (w) x 13.07" (d) x 6.18" (H)
terface	RJ-45 Ethernet 10/100/1000 Base-T	(When Tray	20.5" (w) x 13.07" (d) x 6.18" (H)
perating	Windows 98, ME, NT4.0, 2000, XP, 2003/2008 Server,	is expanded)	
ystems	Vista, Novell® Netware® 3x,4x, 5x, MAC OS-9.0, MAC OS-X,		
	Sun® OS 4.1x, Solaris® 2 x, Unix®, Linux®, Citrix® (Metaframe,	Optional Equi	
	Presentation Server 4, 4.5) and Windows Terminal Services	MX-FN12	Inner Finisher
etwork	TCP/IP (IPv4, IPv6, IPSEC) SSL (HTTP, IPP, FTP), SNMPv3,	MX-CFABB	Base Plate with locking casters
rotocols	802.1x for Windows and Unix. LPD and LPR for UNIX.	MX-CFABD	Deluxe Cabinet with door and locking
	IPX/SPX® for Novell environments. EtherTalk® and NetBEUI,	MX-CSX1	500 sheet Paper Feed Unit for Tray 2
	AppleTalk for Macintosh® environments.	MX-CSX2	500 sheet Paper Feed Unit for Trays 3
rinting	LPR, IPP, IPPS, PAP, Raw TCP (port 9100), FTP and Novell	MX-PKX5	Postscript 3 Kit (for use with DX-C310
rotocols	Pserver/Rprinter	MX-PUX1	XPS Expansion Kit (Requires MX-SHP
etwork	IP/Mac address filtering, protocol filtering, port management,	MX-SHP1GBXPS	Expansion Memory 1 GB (Required fo
ecurity	user authentication and document administration.	AR-PF1	Bar Code Font Kit
ecurity	IEEE 2600-2008, DoD (NSTISSP) #11, DoD Directive 8500.2,	MX-FR13U	Commercial Data Security Kit
tandards	DoD (DISA)		(for use with DX-C311/DX-C401)
		MX-FR12U	Commercial Data Security Kit
	ning Systems (Standard)	MANY 510/0	(for use with DX-C310/DX-C400)
lax Original Size		MX-FXX3	Fax Expansion Kit
ptical Resolution		MX-FWX1	Internet Fax Expansion Kit
utput Modes	600 dpi, 400 dpi, 300 dpi, 200 dpi, 100 dpi	MX-AMX1	Application Integration Module

MX-BTX1 Supplies

MX-AMX2

MX-AMX3

MX-USX1

MX-USX5

MX-USX10

MX-USX50

MX-USA0

External Accounting Module

Sharpdesk 1 License Kit

Sharpdesk 5 License Kit

Sharpdesk 10 License Kit

Sharpdesk 50 License Kit

Sharpdesk 100 License Kit

Business Card Feeder

Application Communication Module

500 sheet Paper Feed Unit for Tray 2 500 sheet Paper Feed Unit for Trays 3 & 4

Deluxe Cabinet with door and locking casters

Postscript 3 Kit (for use with DX-C310/DX-C400)

Expansion Memory 1 GB (Required for MX-PUX1)

XPS Expansion Kit (Requires MX-SHP1GBXPS)

Approximately 2 seconds with Super G3/JBIG4

Forwards received fax data to E-mail, FTP, Desktop, SMB

Quick on-line transmission, direct transmission, F-Code

transmission/reception, rotate transmission, anti-junk fax reception, automatically staple received faxes, secure fax release, out of paper memory reception, auto redial, duplex reception transaction reports, activity reports and PC Fax.

Plain/Thin/Heavy/Recycled/Letterhead/Pre-punched/

Up to 999 (combined scan destinations)

DX-C40NTB	Black Toner Cartridge
DX-C40NTC	Cyan Toner Cartridge
DX-C40NTM	Magenta Toner Cartridge
DX-C40NTY	Yellow Toner Cartridge
MX-C40NVB	Black Developer
MX-C40NVC	Cyan Developer
MX-C40NVM	Magenta Developer
MX-C40NVY	Yellow Developer
MX-C40NRB	Black Drum Cartridge
MX-C40NRS	Color Drum Cartridge
MX-C31U1	Primary Transfer Belt Unit
MX-C31U2	Secondary Transfer Roller Unit
MX-C31FU1	Fusing Unit (120V)
MX-C31HB	Toner Collection Container
MX-SCX1	Staple Cartridge (3 cartridges per carton)

Paper capacity is based on leter size paper

Actual transmission time will vary based on line conditions

⁴ Based on Sharp Standard Test Chart with approximately 700 characters,

letter size in standard resolution ⁵ Some optional equipment may require dealer installation

reliability

